

| 品 號<br>Washer No. | 適用螺絲直徑<br>Screw/Thread Size |            |                 | 墊 圈 尺 寸 Lock Washer Dimension (mm) |            |                    |             |                      |            |                         | 包裝<br>Packing    |
|-------------------|-----------------------------|------------|-----------------|------------------------------------|------------|--------------------|-------------|----------------------|------------|-------------------------|------------------|
|                   | 公制<br>mm                    | 英制<br>Inch | 美規番號<br>Code(#) | d<br>內徑<br>ID.(mm)                 | 公差<br>Tol. | D<br>外徑<br>OD.(mm) | 公差<br>Tol.  | t<br>厚度<br>Thickness | 公差<br>Tol. | n<br>齒數<br>Nos of Teeth | 最低訂購數<br>MOQ/MPQ |
| 內齒AW<br>Internal  | 公制<br>mm                    | 英制<br>Inch | 美規番號<br>Code(#) | 內徑<br>ID.(mm)                      | 公差<br>Tol. | 外徑<br>OD.(mm)      | 公差<br>Tol.  | 厚度<br>Thickness      | 公差<br>Tol. | 齒數<br>Nos of Teeth      | 最低訂購數<br>MOQ/MPQ |
| AW- 2.5(2.6)      | 2.5(2.6)                    | —          | —               | 2.7                                | +0.2<br>-0 | 5.7                | +0<br>-0.35 | 0.3                  | ±0.025     | 7                       | 20,000           |
| 3                 | 3                           | —          | —               | 3.2                                |            | 6.5                |             | 0.45                 | ±0.035     | 6                       | 20,000           |
| 3                 | 3                           | —          | —               | 3.2                                |            | 6.5                |             | 0.45                 |            | 7                       | 20,000           |
| 3.5               | 3.5                         | —          | 6#              | 3.7                                |            | 7.5                |             | 0.45                 |            | 8                       | 10,000           |
| 6#                | —                           | 0.138      | 6#              | 3.8                                |            | 7.5                |             | 0.45                 |            | 8                       | 10,000           |
| 4                 | 4                           | —          | —               | 4.3                                |            | 8.5                |             | 0.45                 | ±0.04      | 8                       | 10,000           |
| 8#                | —                           | 0.164      | 8#              | 4.4                                |            | 8.3                |             | 0.45                 |            | 8                       | 10,000           |
| 8#                | —                           | 0.164      | 8#              | 4.4                                |            | 8.3                |             | 0.5                  |            | 8                       | 10,000           |
| 10#               | —                           | 0.186      | 10#             | 5                                  |            | 9.6                |             | 0.5                  |            | 8                       | 5,000            |
| 5                 | 5                           | —          | —               | 5.3                                |            | 10                 |             | 0.5                  | ±0.05      | 8                       | 5,000            |
| 5                 | 5                           | —          | —               | 5.3                                | +0.3<br>-0 | 10                 | +0<br>-0.5  | 0.6                  |            | 8                       | 5,000            |
| 6                 | 6                           | —          | —               | 6.4                                |            | 11                 |             | 0.6                  |            | 9                       | 5,000            |
| 1/4"              | —                           | 1/4        | —               | 6.5                                |            | 12                 |             | 0.6                  |            | 9                       | 3,000            |
| 7                 | 7                           | —          | —               | 7.4                                |            | 13                 |             | 0.8                  |            | 10                      | 3,000            |
| 5/16"             | —                           | 5/16       | —               | 8.3                                |            | 15.4               |             | 0.7                  | ±0.055     | 10                      | 3,000            |
| 8                 | 8                           | —          | —               | 8.4                                |            | 15                 |             | 0.8                  |            | 9                       | 3,000            |
| 3/8"              | —                           | 3/8        | —               | 9.8                                |            | 17.5               |             | 0.8                  |            | 9                       | 2,000            |
| 3/8"              | —                           | 3/8        | —               | 9.8                                |            | 17.5               |             | 0.8                  |            | 10                      | 2,000            |
| 10                | 10                          | —          | —               | 10.5                               | +0.4<br>-0 | 18                 | -0.6        | 0.9                  | ±0.065     | 9                       | 2,000            |
| 7/16"             | —                           | 7/16       | —               | 11.4                               |            | 19.6               |             | 0.8                  |            | 12                      | 2,000            |
| 12                | 12                          | —          | —               | 12.5                               |            | 21                 |             | 1                    |            | 10                      | 2,000            |
| 1/2"              | —                           | 1/2        | —               | 13                                 |            | 22.5               |             | 1                    |            | 12                      | 2,000            |
| 5/8"              | —                           | 5/8        | —               | 16.5                               |            | 27                 |             | 1.1                  | ±0.08      | 12                      | 1,000            |
| 18                | 18                          | —          | —               | 19                                 |            | 29                 |             | 1.2                  |            | 12                      | 500              |
| 3/4"              | —                           | 3/4        | —               | 19.6                               |            | 32                 |             | 1.2                  |            | 12                      | 500              |
| 7/8"              | —                           | 7/8        | —               | 23.1                               |            | 35.5               |             | 1.3                  |            | 12                      | 500              |
| 1"                | —                           | 1          | —               | 26                                 | +0.5<br>-0 | 41                 | +0.5        | 1.5                  |            | 12                      | 500              |
| 1-1/8"            | —                           | 1 1/8      | —               | 29.6                               |            | 46                 |             | 1.5                  |            | 12                      | 200              |
| 1-1/4"            | —                           | 1 1/4      | —               | 33                                 |            | 49                 | -0.2        | 1.5                  |            | 10                      | 200              |

\*未顯示於表格之規格歡迎來電洽詢/規格表僅供參考

Copyright (c) 2020 HJ Spring Co., Ltd. All Rights Reserved

\*Other sizes may be available upon request



◎ 規格標準 Standard Reference


日本工業規格 JIS B 1251

美國標準規格 ASME B18. 21.1

德國工業規格 DIN6797 Form J

◆ AW型-內齒型墊圈

AW SERIES INTERNAL TOOTHED LOCK WASHER

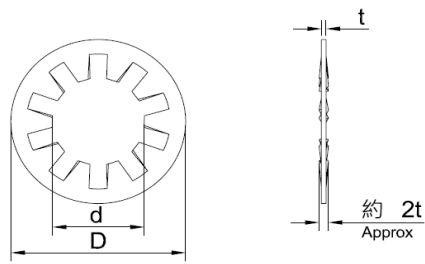

◎ 材質&硬度(參考) Material & Hardness Ranges (Rockwell scale)

彈簧鋼 · 硬度HRC 44-53     Carbon Spring Steel SAE1050~SAE1070, HRC44~HRC53

◎ 表面 Finish

染黑     Black Oxide

鍍白鋅/五彩鋅     Zinc Plating (Bright/Yellow)

鍍鎳     Nickel Plating

◎ 包裝方式 Packaging

散裝     Bulk

最低訂購數量詳見本規格表右側     MOQ/MPQ limit required