

品 號 Washer No.	適用螺絲直徑 Screw/Thread Size			墊 圈 尺 寸 Lock Washer Dimension (mm)							包裝 Packing
	公制 mm	英制 Inch	美規番號 Code(#)	d 內徑 ID.(mm)	公差 Tol.	D 外徑 OD.(mm)	公差 Tol.	t 厚度 Thickness	公差 Tol.	n 齒數 Nos of Teeth	最低訂購數 MOQ/MPQ
BW- 2	2	—	—	2.2	+0.2 -0	4.8	+0	0.3	±0.025	8	20,000
2.5(2.6)	2.5(2.6)	—	—	2.7		5.7	-0.35	0.3		8	20,000
3	3	—	—	3.2		6.5	+0 -0.4	0.45	±0.035	8	20,000
3.5	3.5	—	—	3.7		7.5		0.45		8	10,000
6#	—	0.138	6#	3.6		8.1		0.45		8	10,000
4	4	—	—	4.3		8.5		0.45	±0.04	8	10,000
8#	—	0.164	8#	4.3		9.6		0.6		9	10,000
10#	—	0.190	10#	5		10.4		0.5		9	5,000
10#	—	0.190	10#	5		10.4		0.5		10	5,000
10#	—	0.190	10#	5		10.4		0.6		9	5,000
5	5	—	—	5.3		10		0.6		10	5,000
6	6	—	—	6.4		11		0.6		12	5,000
1/4"	—	1/4	—	6.6	+0.3 -0	12.9	+0 -0.5	0.6	±0.05	12	5,000
1/4"	—	1/4	—	6.6		12.9		0.7		10	5,000
1/4"	—	1/4	—	6.6		12.9		0.8		10	5,000
5/16"	—	5/16	—	8.3		15.4		0.7		12	3,000
5/16"	—	5/16	—	8.3		15.4		0.8		12	3,000
8	8	—	—	8.4		15		0.8		12	3,000
3/8"	—	3/8	—	9.8		17.5		0.9		12	3,000
3/8"	—	3/8	—	9.8		17.5		1		12	3,000
10	10	—	—	10.5		18		0.9		12	3,000
7/16"	—	7/16	—	11.4		19.5		0.9		12	2,000
12	12	—	—	12.5	+0.4 -0	21	+0 -0.6	1	±0.055	12	2,000
1/2"	—	1/2	—	13		22.7		1		12	2,000
14	14	—	—	14.5		23		1	±0.065	12	1,000
9/16"	—	9/16	—	14.7		24.9		1.1		12	1,000
5/8"	—	5/8	—	16.5		27		1.2		14	1,000
3/4"	—	3/4	—	19.6		32		1.2		14	500
7/8"	—	7/8	—	23		35.6	+0 -0.75	1.5	±0.07	12	500
1"	—	1	—	26		41		1.5		16	500

*未顯示於表格之規格歡迎來電洽詢/規格表僅供參考

Copyright (c) 2020 HJ Spring Co., Ltd. All Rights Reserved

*Other sizes may be available upon request




◎ 規格標準 Standard Reference

日本工業規格 JIS B 1251

美國標準規格 ASME B18. 21.1

德國工業規格 DIN6797 Form A

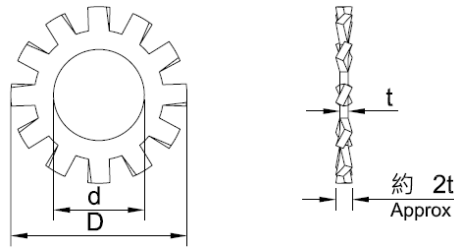

◎ 材質&硬度(參考) Material & Hardness Ranges (Rockwell scale)

彈簧鋼 · 硬度HRC 44-53 Carbon Spring Steel SAE1050~SAE1070, HRC44~HRC53

◎ 表面 Finish

染黑 Black Oxide

鍍白鋅/五彩鋅 Zinc Plating (Bright/Yellow)

鍍鎳 Nickel Plating

◎ 包裝方式 Packaging

散裝 Bulk

最低訂購數量詳見本規格表右側 MOQ/MPQ limit required